


FD6内牙直接头

FD6 DIRECT HEAD OF INTERNAL TEETH

产品线图

Product line diagram

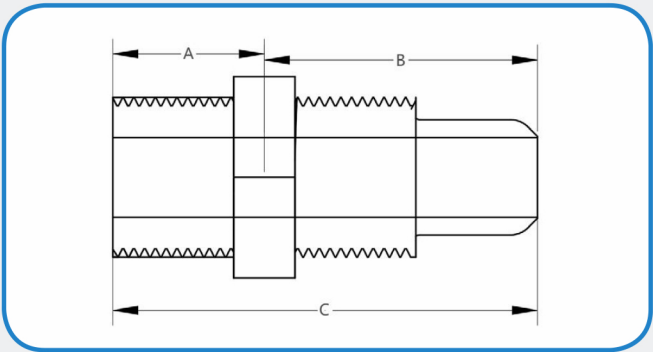

产品材质

Product material

- PFA
- 接口形式：扩口连接
- 最高使用温度：205℃
- 最高使用压力：0.75MPa
- 传送介质：液体
- *螺帽有PFA和PVDF材质可选
- *PVDF不适用于温度超过120℃的应用

- PFA
- Interface form: flared connection
- Maximum operating temperature: 205℃
- Maximum operating pressure: 0.75MPa
- Transmission medium: liquid
- *The nuts are available in PFA and PVDF materials
- *PVDF is not suitable for applications with temperatures exceeding 120℃

产品特性

Product characteristics

专业应用于高纯度的半导体行业，也适合于超纯水或腐蚀性化学物质，在-40℃至200℃之间可维持良好的尺寸稳定性和耐腐蚀性，并具有良好的机械特征，抗磨损。

Professional application in the high-purity semiconductor industry, also suitable for ultrapure water or corrosive chemicals. It can maintain good dimensional stability and corrosion resistance between -40℃ and 200℃, and has good mechanical characteristics and wear resistance.

产品参数

Product parameter

产品名称	管外径1	管外径2	通径1 (mm)	通径2 (mm)	A (mm)	B (mm)	C (mm)
1/4内牙*1/4直通	1/4内牙	1/4	11.4	3.2	18.6	30.1	48.7
1/4内牙*3/8直通	1/4内牙	3/8	11.4	6.5	19.1	31.6	50.7
3/8内牙*1/4直通	3/8内牙	1/4	15.1	3.2	19.8	30.1	49.9
3/8内牙*3/8直通	3/8内牙	3/8	15.1	6.5	19.8	31.3	51.1
3/8内牙*1/2直通	3/8内牙	1/2	15.1	9.6	19.7	32.9	52.6
1/2内牙*3/8直通	1/2内牙	3/8	18.6	6.5	19.6	29.9	49.5
1/2内牙*1/2直通	1/2内牙	1/2	18.6	9.6	19.6	35.5	55.1
1/2内牙*3/4直通	1/2内牙	3/4	18.6	16.1	19.6	36.4	56
3/4内牙*3/8直通	3/4内牙	3/8	23.3	6.5	20.4	31.1	51.5
3/4内牙*3/4直通	3/4内牙	3/4	23.3	16.1	20.4	36.4	56.8
3/4内牙*1/2直通	3/4内牙	1/2	23.3	9.6	20.4	32.7	53.1
1寸内牙*1寸直通	1寸内牙	1寸	29.3	22.5	24.6	44.8	69.4



法宝公众号



微信号

网址: <http://www.mgwflex.cn>

邮箱: zx@mgwflex.com market@mgwflex.com

地址: 广州市增城区宁西街创誉路74号自编A1-4004、4003A

Address: No. 74 Chuangyu Road, Ningxi Street, Zengcheng District, Guangzhou City, China