
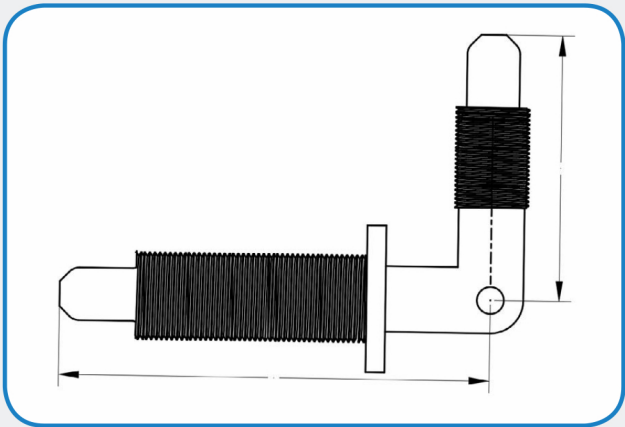


FD7s隔板弯接头

FD7s P ARTITION BENDING JOINT

产品线图

Product line diagram

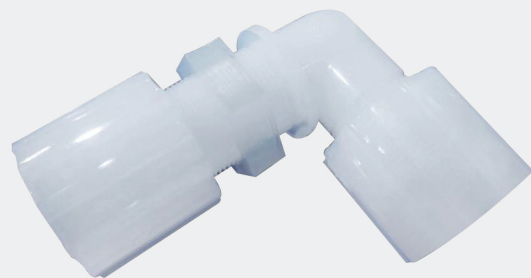

产品材质

Product material

- PFA
- 接口形式：扩口连接
- 最高使用温度：205℃
- 最高使用压力：0.75MPa
- 传送介质：液体
- *螺帽有PFA和PVDF材质可选
- *PVDF不适用于温度超过120℃的应用

- PFA
- Interface form: flared connection
- Maximum operating temperature: 205℃
- Maximum operating pressure: 0.75MPa
- Transmission medium: liquid
- *The nuts are available in PFA and PVDF materials
- *PVDF is not suitable for applications with temperatures exceeding 120℃

产品特性

Product characteristics

专业应用于高纯度的半导体行业，也适合于超纯水或腐蚀性化学物质，在-40℃至200℃之间可维持良好的尺寸稳定性和耐腐蚀性，并具有良好的机械特征，抗磨损。

Professional application in the high-purity semiconductor industry, also suitable for ultrapure water or corrosive chemicals. It can maintain good dimensional stability and corrosion resistance between -40℃ and 200℃, and has good mechanical characteristics and wear resistance.

产品参数

Product parameter

产品名称	管外径1	管外径2	通径1 (mm)	通径2 (mm)	A (mm)	B (mm)
1/4隔板弯头	1/4	1/4	3.2	3.2	61	38
3/8隔板弯头	3/8	3/8	6.5	6.5	59.5	40.5
1/2隔板弯头	1/2	1/2	9.6	9.6	63.3	43.5
3/4隔板弯头	3/4	3/4	16.1	16.1	73.7	51.1
1寸隔板弯头	1寸	1寸	23	23	81.1	62.1



法宝公众号



微信号

网址: <http://www.mgwflex.cn>

邮箱: zx@mgwflex.com market@mgwflex.com

地址: 广州市增城区宁西街创誉路74号自编A1-4004、4003A

Address: No. 74 Chuangyu Road, Ningxi Street, Zengcheng District, Guangzhou City, China