



FD4s变径三通接头

FD4S VARIABLE DIAMETER TEE JOINT

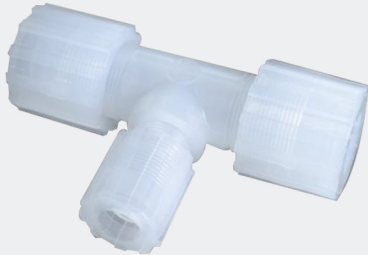

产品线图 Product line diagram

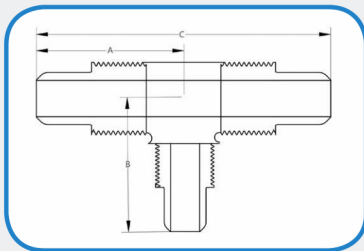

产品参数 Product parameter

产品材质 Product material

- PFA
- 接口形式：扩口连接
- 最高使用温度：205°C
- 最高使用压力：0.75MPa
- 传送介质：液体
- *螺帽有PFA和PVDF材质可选
- *PVDF不适用于温度超过120°C的应用
- PFA
- Interface form: flared connection
- Maximum operating temperature: 205°C
- Maximum operating pressure: 0.75MPa
- Transmission medium: liquid
- *The nuts are available in PFA and PVDF materials
- *PVDF is not suitable for applications with temperatures exceeding 120°C

产品特性 Product characteristics

专业应用于高纯度的半导体行业，也适合于超纯水或腐蚀性化学物质，在-40°C至 200°C之间可维持良好的尺寸稳定性和耐腐蚀性，并具有良好的机械特征，抗磨损。

Professional application in the high-purity semiconductor industry, also suitable for ultrapure water or corrosive chemicals. It can maintain good dimensional stability and corrosion resistance between -40°C and 200°C, and has good mechanical characteristics and wear resistance.

产品名称	管外径1	管外径2	通径1 (mm)	通径2 (mm)	A (mm)	B (mm)	C (mm)
1/4*3/4*1/4三通	1/4	3/4	3.2	16.1	43.2	50.8	86.4
1/4*1/2*1/4三通	1/4	1/2	3.2	9.6	39.1	42	78.2
3/8*1/4*1/4三通	3/8	1/4	6.5	3.2	40.3	39.1	78.7
3/8*3/8*1/4三通	3/8	1/4	6.5	3.2	40.3	40.3	79.4
3/8*1/2*3/8三通	3/8	1/2	6.5	9.6	40.3	42	80.6
3/8*3/4*3/8三通	3/8	3/4	6.5	16.1	46.5	50.8	92.8
1/2*1/4*1/2三通	1/2	1/4	9.6	3.2	42	39	84
1/2*3/8*1/2三通	1/2	3/8	9.6	6.5	46.3	40.3	84
1/2*1/2*1/4三通	1/2	1/2	9.6	9.6	42	42	81
1/2*1/2*3/8三通	1/2	1/2	9.6	9.6	42	42	81.5
1/2*3/4*1/2三通	1/2	3/4	9.6	16.1	49	50.8	94.8
1/2*1寸*1/2三通	1/2	1寸	9.6	22.5	42	63.9	84
3/4*1/4*3/4三通	3/4	1/4	16.1	3.2	50.4	43	100.8
3/4*3/8*3/4三通	3/4	3/8	16.1	6.5	50.3	44	100
3/4*1/2*3/4三通	3/4	1/2	16.1	9.6	50.4	46.3	100.8
3/4*3/4*1/4三通	3/4	1/4	16.1	3.2	50.4	50.4	93.4
3/4*3/4*3/8三通	3/4	3/8	16.1	6.5	50.4	50.4	95.2
3/4*3/4*1/2三通	3/4	1/2	16.1	9.6	50.4	50.4	97.2
3/4*1/2*1/2三通	3/4	1/2	16.1	9.6	49.6	46.2	96.2
3/4*1寸*3/4三通	3/4	1寸	16.1	22.5	50.3	57.5	113
1寸*1/4*1寸三通	1寸	1/4	22.5	3.2	62.2	31.5	124.4
1寸*3/8*1寸三通	1寸	3/8	22.5	6.5	62.2	47.8	124.4
1寸*1/2*1寸三通	1寸	1/2	22.5	9.6	62.2	53.8	124.4
1寸*3/4*1寸三通	1寸	3/4	22.5	16.1	62.2	57.2	124.4
1寸*1寸*3/8三通	1寸	3/8	22.5	6.5	62.2	62.2	76.7
1寸*1寸*1/2三通	1寸	1/2	22.5	9.6	62.2	62.2	114



法宝公众号



微信号

网址: <http://www.mgwflex.cn>

邮箱: zx@mgwflex.com market@mgwflex.com

地址: 广州市增城区宁西街创誉路74号自编A1-4004、4003A

Address: No. 74 Chuangyu Road, Ningxi Street, Zengcheng District, Guangzhou City, China