


FD5外牙弯接头

FD5 EXTERNAL TOOTH BENDING JOINT

产品线图

Product line diagram

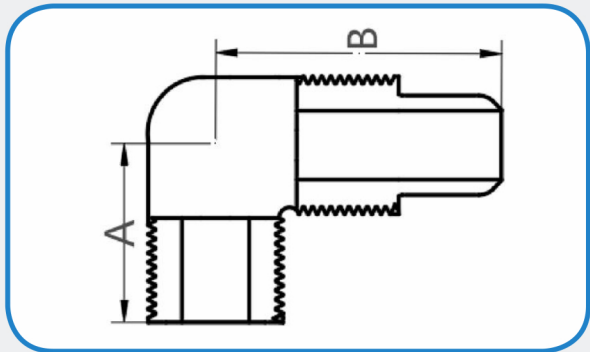

产品材质

Product material

- PFA
- 接口形式：扩口连接
- 最高使用温度：205℃
- 最高使用压力：0.75MPa
- 传送介质：液体
- *螺帽有PFA和PVDF材质可选
- *PVDF不适用于温度超过120℃的应用

- PFA
- Interface form: flared connection
- Maximum operating temperature: 205℃
- Maximum operating pressure: 0.75MPa
- Transmission medium: liquid
- *The nuts are available in PFA and PVDF materials
- *PVDF is not suitable for applications with temperatures exceeding 120℃

产品特性

Product characteristics

专业应用于高纯度的半导体行业，也适合于超纯水或腐蚀性化学物质，在-40℃至200℃之间可维持良好的尺寸稳定性和耐腐蚀性，并具有良好的机械特征，抗磨损。

Professional application in the high-purity semiconductor industry, also suitable for ultrapure water or corrosive chemicals. It can maintain good dimensional stability and corrosion resistance between -40℃ and 200℃, and has good mechanical characteristics and wear resistance.

产品参数

Product parameter

产品名称	管外径1	管外径2	通径1 (mm)	通径2 (mm)	A (mm)	B (mm)
1/8牙*1/4带丝弯头	1/8牙	1/4	5	3.2	15.8	38
1/4牙*3/8带丝弯头	1/4牙	3/8	7.4	6.5	26.8	41
1/4牙*1/2带丝弯头	1/4牙	1/2	7.4	9.6	31.3	43.9
1/4牙*3/4带丝弯头	1/4牙	3/4	7.4	16.1	31.3	56.2
3/8牙*1/2带丝弯头	3/8牙	1/2	10.7	9.6	30.5	47
3/8牙*1/4带丝弯头	3/8牙	1/4	10.7	3.2	30.5	41
3/8牙*3/4带丝弯头	3/8牙	3/4	10.7	16.1	30.8	51
1/2牙*3/8带丝弯头	1/2牙	3/8	14	16.1	30.8	43.3
1/2牙*3/4带丝弯头	1/2牙	3/4	14	16.1	30.8	51
3/4牙*3/8带丝弯头	3/4牙	3/8	17.5	6.5	30	45.2
3/4牙*1/2带丝弯头	3/4牙	1/2	17.5	9.6	35.6	47.5
3/4牙*1寸带丝弯头	3/4牙	1寸	17.5	22.5	40.6	62.1
1寸牙*3/4带丝弯头	1寸牙	3/4	25	16.1	47.2	57.5



法宝公众号



微信号

网址: <http://www.mgwflex.cn>

邮箱: zx@mgwflex.com market@mgwflex.com

地址: 广州市增城区宁西街创誉路74号自编A1-4004、4003A

Address: No. 74 Chuangyu Road, Ningxi Street, Zengcheng District, Guangzhou City, China