


NR1

中型抽吸/输送软管


- 管 壁：聚醚型聚氨酯，食品级
- 螺旋圈：螺旋钢丝
- 壁 厚：约1.0mm
- 温度范围：-40℃至+90℃
短时间可达125℃

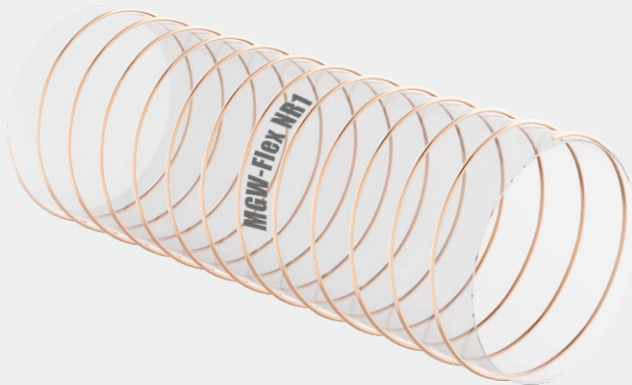

介质



特性



特性：

内壁光滑、弯曲灵活、耐磨耐腐蚀、耐油、无毒、无卤、无软化剂、抗菌
抗水解软管符合欧盟EU Regulations 1935/2004, 10/2011和1282/2011
原材料符合FDA 21 CFR 177.2600和1782010标准

应用：

用于磨损性较强的颗粒粉体物料输送
用于食品行业、医药行业、化学行业

物料号	内径 毫米/mm	外径 毫米/mm	壁厚 毫米/mm	弯曲半径 毫米/mm	克重 千克/米 (kg/m)	负压 巴 (bar)	正压 巴 (bar)
NR1-025	25	-	1,0	16	0,19	0,52	1,38
NR1-030	30	-	1,0	22	0,25	0,52	1,38
NR1-032	32	-	1,0	25	0,27	0,52	1,28
NR1-035	35	-	1,0	33	0,30	0,43	1,19
NR1-038	38	-	1,0	33	0,33	0,43	1,19
NR1-040	40	-	1,0	33	0,35	0,43	1,19
NR1-050	50	-	1,0	42	0,41	0,33	1,14
NR1-060	60	-	1,0	52	0,47	0,29	1,09
NR1-075	75	-	1,0	67	0,61	0,24	1,00
NR1-080	80	-	1,0	72	0,65	0,22	1,00
NR1-090	90	-	1,0	86	0,80	0,22	0,81
NR1-100	100	-	1,0	93	0,95	0,22	0,67
NR1-110	110	-	1,0	107	1,02	0,19	0,62



法企公众号



服务微信

网址：<http://www.mgwflex.com>
邮箱：zx@mgwflex.com market@mgwflex.com
地址：广州市增城区宁西街创誉路74号平安硅谷A1栋4001-4004
No. 74 Chuangyu Road, Ningxi Street, Zengcheng District, Guangzhou, 4001-4004, building a 1, Ping an Silicon Valley

物料号	内径 毫米/mm	外径 毫米/mm	壁厚 毫米/mm	弯曲半径 毫米/mm	克重 千克/米 (kg/m)	负压 巴 (bar)	正压 巴 (bar)
NR1-120	120	—	1, 0	113	1, 08	0, 19	0, 62
NR1-125	125	—	1, 0	117	1, 13	0, 19	0, 52
NR1-140	140	—	1, 0	133	1, 18	0, 14	0, 52
NR1-150	150	—	1, 0	145	1, 25	0, 14	0, 42
NR1-160	160	—	1, 0	155	1, 34	0, 14	0, 38
NR1-180	180	—	1, 0	175	1, 68	0, 11	0, 33
NR1-200	200	—	1, 0	195	1, 87	0, 09	0, 29
NR1-215	215	—	1, 0	211	2, 01	0, 09	0, 29
NR1-225	225	—	1, 0	219	2, 11	0, 08	0, 24
NR1-250	250	—	1, 0	247	2, 35	0, 08	0, 24
NR1-300	300	—	1, 0	297	3, 08	0, 06	0, 19
NR1-350	350	—	1, 0	347	3, 75	0, 05	0, 17
NR1-400	400	—	1, 0	397	4, 24	0, 05	0, 14
NR1-450	450	—	1, 0	448	5, 42	0, 05	0, 14
NR1-500	500	—	1, 0	500	60, 2	0, 05	0, 14

依据要求可订制更多尺寸.



法企公众号



服务微信

网址: <http://www.mgwflex.com>
邮箱: zx@mgwflex.com market@mgwflex.com
地址: 广州市增城区宁西街创誉路74号平安硅谷A1栋4001-4004
No. 74 Chuangyu Road, Ningxi Street, Zengcheng District, Guangzhou, 4001-4004, building a 1, Ping an Silicon Valley