


FD1外牙直接头

FD1 DIRECTHEAD OF EXTERNAL TEETH



产品线图 Product line diagram

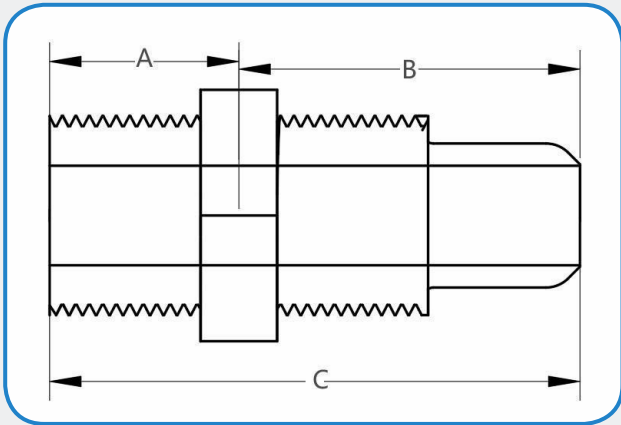

产品材质 Product material

- PFA
 - 接口形式：扩口连接
 - 最高使用温度：200℃
 - 最高使用压力：0.7MPa
 - 传送介质：液体
 - *螺帽有PFA和PVDF材质可选
 - *PVDF不适用于温度超过120℃的应用
- PFA
 - Interface form: flared connection
 - Maximum operating temperature: 200℃
 - Maximum operating pressure: 0.7MPa
 - Transmission medium: liquid
 - *The nuts are available in PFA and PVDF materials
 - *PVDF is not suitable for applications with temperatures exceeding 120℃

产品特性 Product characteristics

专业应用于高纯度的半导体行业，也适合于超纯水或腐蚀性化学物质，在-40℃至200℃之间可维持良好的尺寸稳定性和耐腐蚀性，并具有良好的机械特征，抗磨损。

Professional application in the high-purity semiconductor industry, also suitable for ultrapure water or corrosive chemicals. It can maintain good dimensional stability and corrosion resistance between -40℃ and 200℃, and has good mechanical characteristics and wear resistance.

产品参数 Product parameter

产品名称	管外径1	管外径2	通径1 (mm)	通径2 (mm)	A (mm)	B (mm)	C (mm)
1/8牙*1/8直通	1/8牙	1/8	5	2	11.8	16	27.8
1/4牙*1/4直通	1/4牙	1/4	7.4	3.2	18.7	28.6	47.3
3/8牙*3/8直通	3/8牙	3/8	10.7	6.5	17.4	30.9	48.3
1/2牙*1/2直通	1/2牙	1/2	14	9.6	20.7	32.7	53.4
3/4牙*3/4直通	3/4牙	3/4	17.5	16.1	21.4	36.7	58.1
1寸牙*1寸直通	1寸牙	1寸	25	22.5	25.3	41.7	67
1/8牙*1/4直通	1/8牙	1/4	5	3.2	15.9	29.1	45
1/8牙*3/8直通	1/8牙	3/8	5	6.5	15.9	31.3	47.2
1/4牙*3/8直通	1/4牙	3/8	7.4	6.5	18.7	31.3	50
1/4牙*1/2直通	1/4牙	1/2	7.4	13.8	18.3	32.3	50.6
3/8牙*1/8直通	3/8牙	1/8	10.7	7.8	16.9	16	32.9
3/8牙*3/4直通	3/8牙	3/4	10.7	15.5	17.4	36.4	53.8
3/8牙*1/4直通	3/8牙	1/4	10.7	7.5	17.4	28.5	45.9
3/8牙*3/8直通	3/8牙	3/8	10.7	6.5	17.4	30.9	48.3
3/8牙*1/2直通	3/8牙	1/2	10.7	9.6	16.9	32.9	49.8
1/2牙*1/4直通	1/2牙	1/4	14	7.5	20.7	29.8	50.5
1/2牙*3/8直通	1/2牙	3/8	14	6.5	20.7	30.8	51.5
1/2牙*3/4直通	1/2牙	3/4	14	9.6	20.7	36.4	57.1
1/2牙*1寸直通	1/2牙	1寸	14	22.5	20.7	41.7	62.4
3/4牙*1/4直通	3/4牙	1/4	17.5	3.2	20.4	29.1	49.5
3/4牙*3/8直通	3/4牙	3/8	17.5	6.5	20.4	31.1	51.5
3/4牙*1/2直通	3/4牙	1/2	17.5	9.6	20.4	32.7	53.1
3/4牙*1寸直通	3/4牙	1寸	17.5	22.5	20.6	41.7	62.3
1寸牙*3/8直通	1寸牙	3/8	25	6.5	25.3	31.3	56.6
1寸牙*1/2直通	1寸牙	1/2	25	9.6	25.3	32.3	57.6
1寸牙*3/4直通	1寸牙	3/4	25	16.1	25.3	36.7	62



法宝公众号




微信号

网址: <http://www.mgwflex.cn>
邮箱: zx@mgwflex.com market@mgwflex.com
地址: 广州市增城区宁西街创誉路74 号自编A1-4004、4003A
Address: No. 74 Chuangyu Road, Ningxi Street, Zengcheng District, Guangzhou City, China



法宝公众号



微信号

网址: <http://www.mgwflex.cn>
邮箱: zx@mgwflex.com market@mgwflex.com
地址: 广州市增城区宁西街创誉路74 号自编A1-4004、4003A
Address: No. 74 Chuangyu Road, Ningxi Street, Zengcheng District, Guangzhou City, China